


Performance curves

Single-stage bare shaft end-suction pumps

LBS 32-250

2-pole

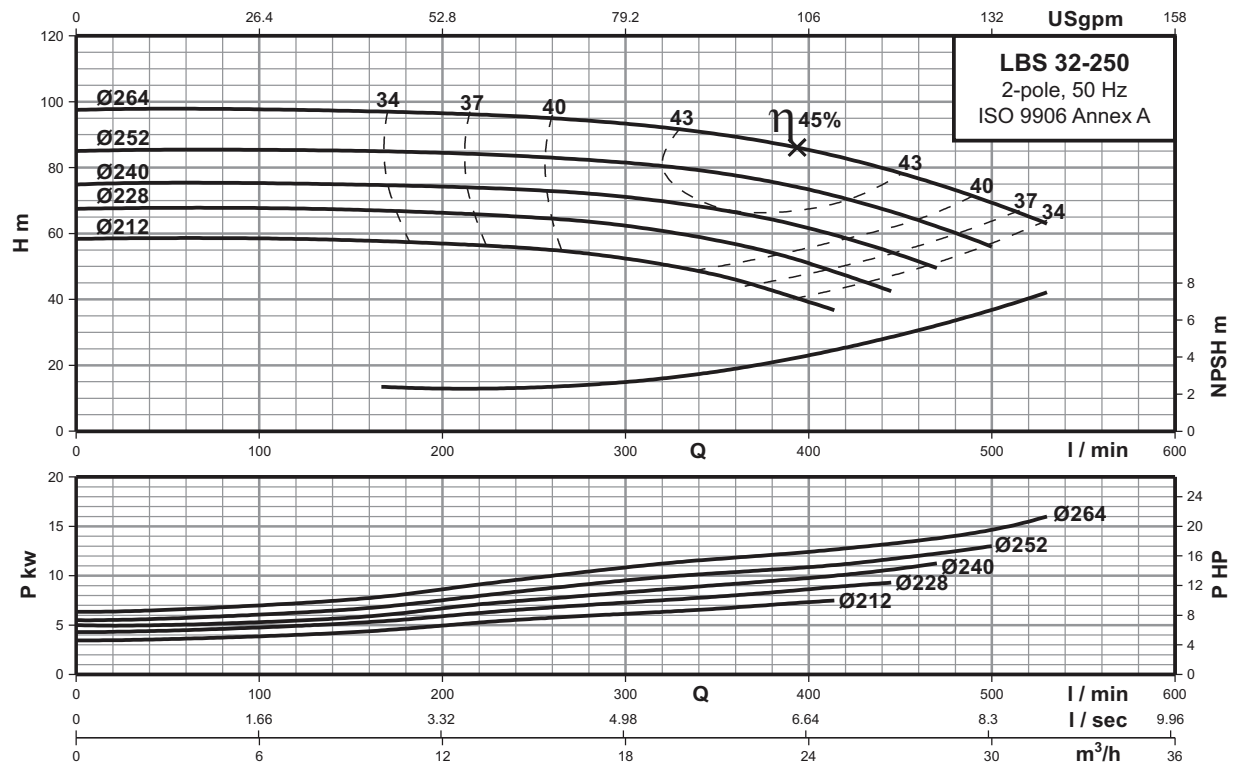

2 POLE

Technical data

Power	[kw]	7.5	9.3	11	15
	[hp]	10	12.5	15	20
Frame		132M	160M	160M	160M
PN	[bar]	16	16	16	16
DNs	[mm]	50	50	50	50
DNd	[mm]	32	32	32	32
a	[mm]	100	100	100	100
h2	[mm]	225	225	225	225
L	[mm]	979	1079	1079	1079
l1	[mm]	1120	1250	1250	1250
l2	[mm]	190	205	205	205
l3	[mm]	740	840	840	840
b1	[mm]	380	430	430	430
b2	[mm]	490	540	540	540
b3	[mm]	440	490	490	490
d	[mm]	24	24	24	24
a2	[mm]	75	75	75	75
h	[mm]	80	80	80	80
h3	[mm]	260	260	260	260
h4	[mm]	464	503	503	503
Base frame no.		5	6	6	6
Net Weight	[kg]	146	180	188	204
Gross Weight	[kg]	219	264	272	288
Volume	[m³]	0.596	0.731	0.731	0.731