


Performance curves

Single-stage bare shaft end-suction pumps

LBS 65-250L

2-pole

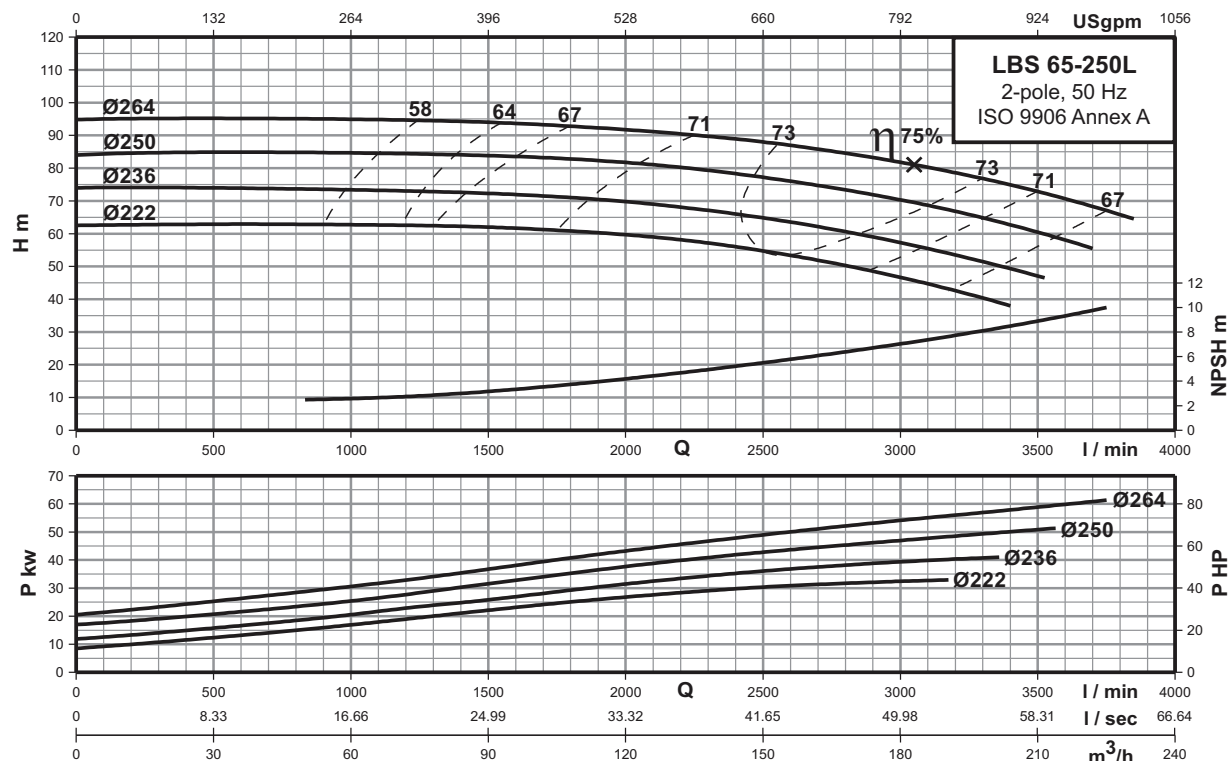

2 POLE

Technical data

Power	[kw]	30	37	45	55
	[hp]	40	50	60	75
Frame		200L	200L	225M	250M
PN	[bar]	16	16	16	16
DNs	[mm]	100	100	100	100
DNd	[mm]	65	65	65	65
a	[mm]	100	100	100	100
h2	[mm]	250	250	250	250
L	[mm]	1373	1373	1410	1508
l1	[mm]	1400	1400	1400	1600
l2	[mm]	230	230	230	270
l3	[mm]	940	940	940	1060
b1	[mm]	480	480	480	530
b2	[mm]	610	610	610	660
b3	[mm]	550	550	550	600
d	[mm]	28	28	28	28
a2	[mm]	90	90	90	90
h	[mm]	100	100	100	100
h3	[mm]	300	300	325	350
h4	[mm]	606	606	653	764
Base frame no.		7	7	7	8
Net Weight	[kg]	399	419	456	627
Gross Weight	[kg]	504	524	566	758
Volume	[m³]	1.038	1.038	1.101	1.452