


Technical Data

Radial Flow 6" Electric Submersible Pump

J13H

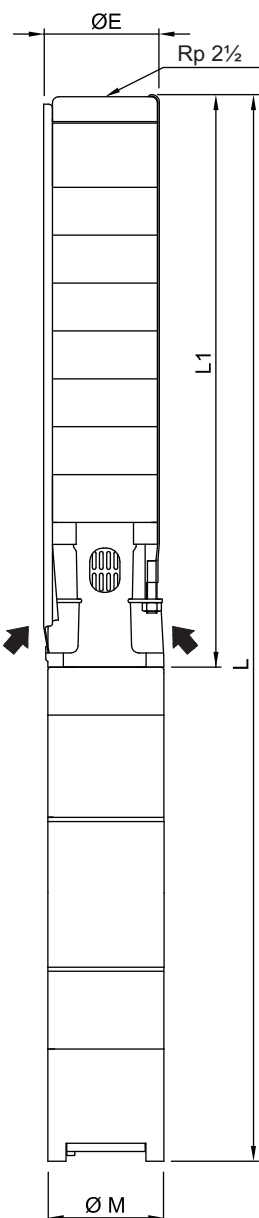

Performance Chart

Pump Type	Motor Type		H.P.	KW	Q	n = 2900 rpm						
	Oil filled	Water filled			M ³ /h	0	6.0	9.9	12.0	13.0	14.1	15.6
					l/min	0	100	165	200	217	235	260
J13H/04	H4530	L4530	3.00	2.20	H mts.	62	58	52	47	44	40	34
J13H/05	H4540	L4540	4.00	3.00		78	73	65	59	55	50	43
J13H/06	H4555	L4555	5.50	4.00		93	87	78	71	66	60	51
J13H/07	H4555	L4555	5.50	4.00		109	102	91	82	77	70	60
J13H/08	H4575	L4575	7.50	5.50		124	116	104	94	88	80	68
J13H/09	H4575	L4575	7.50	5.50		140	131	117	106	99	90	77
J13H/10	H4575	L4575	7.50	5.50		155	145	130	118	110	100	85
J13H/11	H45100	L6510-KP	10.00	7.50		171	160	143	129	121	110	94
J13H/12	H45100	L6510-KP	10.00	7.50		186	174	156	141	132	120	102
J13H/13	H45100	L6510-KP	10.00	7.50		202	189	169	153	143	130	111
J13H/14	-	L6512-KP	12.50	9.30		217	203	182	165	154	140	119
J13H/15	-	L6512-KP	12.50	9.30		233	218	195	176	165	150	128
J13H/16	-	L6512-KP	12.50	9.30		248	232	208	188	176	160	136
J13H/17	-	L6515-KP	15.00	11.00		264	247	221	200	187	170	145
J13H/18	-	L6515-KP	15.00	11.00		279	261	234	212	198	180	153
J13H/19	-	L6515-KP	15.00	11.00		295	276	247	223	209	190	162
J13H/20	-	L6517-KP	17.50	13.00		310	290	260	235	220	200	170
J13H/21	-	L6517-KP	17.50	13.00		326	305	273	247	231	210	179
J13H/22	-	L6517-KP	17.50	13.00		341	319	286	259	242	220	187
J13H/23	-	L6520-KP	20.00	15.00		357	334	299	270	253	230	196
J13H/24	-	L6520-KP	20.00	15.00		372	348	312	282	264	240	204
J13H/25	-	L6520-KP	20.00	15.00		388	363	325	294	275	250	213

Dimensions & Weights of Pump with Oil filled Motor

Type Pump + Motor	ØM (mm)	ØE (mm)	Length (mm)			Packaging Details					
			L1	L		Gross Weight (kg)			Gross Volume (m ³)		
				1 ~	3 ~	Pump	Pump+Motor		Pump	Pump+Motor	
							1 ~	3 ~		1 ~	3 ~
J13H/04 + H4530	95	143	504	1076	1016	10.1	29.6	25.6	0.0269	0.0378	0.0363
J13H/05 + H4540	95	143	549	-	1121	12.3	-	30.8	0.0269	-	0.0378
J13H/06 + H4555	95	143	594	1316	1216	14.5	36.2	36.2	0.0269	0.0378	0.0409
J13H/07 + H4555	95	143	639	1361	1261	16.7	38.4	38.4	0.0269	0.0378	0.0409
J13H/08 + H4575	95	143	684	-	1396	18.9	-	44.6	0.0269	-	0.0409
J13H/09 + H4575	95	143	729	-	1441	20.8	-	46.5	0.0269	-	0.0409
J13H/10 + H4575	95	143	774	-	1486	23.3	-	49.0	0.0269	-	0.0409
J13H/11 + H45100	95	143	819	-	1631	25.3	-	56.9	0.0269	-	0.0409
J13H/12 + H45100	95	143	864	-	1676	27.7	-	59.3	0.0269	-	0.0409
J13H/13 + H45100	95	143	909	-	1721	29.3	-	60.9	0.0269	-	0.0409

Dimensions & Weights of Pump with Water filled Motor

Type Pump + Motor	ØM (mm)	ØE (mm)	Length (mm)			Packaging Details					
			L1	L		Gross Weight (kg)			Gross Volume (m ³)		
				1 ~	3 ~	Pump	Pump+Motor		Pump	Pump+Motor	
							1 ~	3 ~		1 ~	3 ~
J13H/04 + L4530	95	143	504	1147	1097	10.1	35.5	34.6	0.0269	0.0378	0.0378
J13H/05 + L4540	95	143	549	-	1222	12.3	-	39.3	0.0269	-	0.0409
J13H/06 + L4555	95	143	594	1387	1317	14.5	43.8	43.8	0.0269	0.0378	0.0409
J13H/07 + L4555	95	143	639	1432	1362	16.7	46.0	46.0	0.0269	0.0378	0.0409
J13H/08 + L4575	95	143	684	-	1527	18.9	-	50.4	0.0269	-	0.0409
J13H/09 + L4575	95	143	729	-	1572	20.8	-	52.3	0.0269	-	0.0409
J13H/10 + L4575	95	143	774	-	1617	23.3	-	54.8	0.0269	-	0.0409
J13H/11 + L6510-KP	142	143	819	-	1577	25.3	-	90.3	0.0269	-	0.0779
J13H/12 + L6510-KP	142	143	864	-	1622	27.7	-	92.7	0.0269	-	0.0779
J13H/13 + L6510-KP	142	143	909	-	1667	29.3	-	94.3	0.0269	-	0.0779
J13H/14 + L6512-KP	142	143	954	-	1752	31.3	-	99.3	0.0412	-	0.0922
J13H/15 + L6512-KP	142	143	999	-	1797	34.3	-	102.3	0.0412	-	0.0922
J13H/16 + L6512-KP	142	143	1044	-	1842	36.3	-	104.3	0.0412	-	0.0922
J13H/17 + L6515-KP	142	143	1089	-	1922	38.3	-	111.3	0.0412	-	0.0922
J13H/18 + L6515-KP	142	143	1134	-	1967	40.5	-	113.5	0.0412	-	0.0922
J13H/19 + L6515-KP	142	143	1179	-	2012	42.3	-	115.3	0.0412	-	0.0922
J13H/20 + L6517-KP	142	143	1224	-	2087	45.3	-	124.3	0.0412	-	0.0922
J13H/21 + L6517-KP	142	143	1269	-	2132	47.2	-	126.2	0.0412	-	0.0922
J13H/22 + L6517-KP	142	143	1314	-	2177	49.7	-	128.7	0.0412	-	0.0922
J13H/23 + L6520-KP	142	143	1359	-	2292	52.0	-	139.0	0.0412	-	0.1002
J13H/24 + L6520-KP	142	143	1404	-	2337	54.1	-	141.1	0.0412	-	0.1002
J13H/25 + L6520-KP	142	143	1449	-	2382	56.3	-	143.3	0.0412	-	0.1002



Rp 2 & Rp 3
Available on request.

Note : ØE = For Single Cable Motor Maximum Diameter of Pump Inclusive of Cable Guard.
For Two Cable Motor Maximum Diameter of Pump Inclusive of Cable Guard Will Increase by 3mm.
For 4" Oil Filled and 4" Water Filled 3~ Motor add **-T** Subscript to Motor type.

Performance Curves

Radial Flow 6" Electric Submersible Pump

J13H

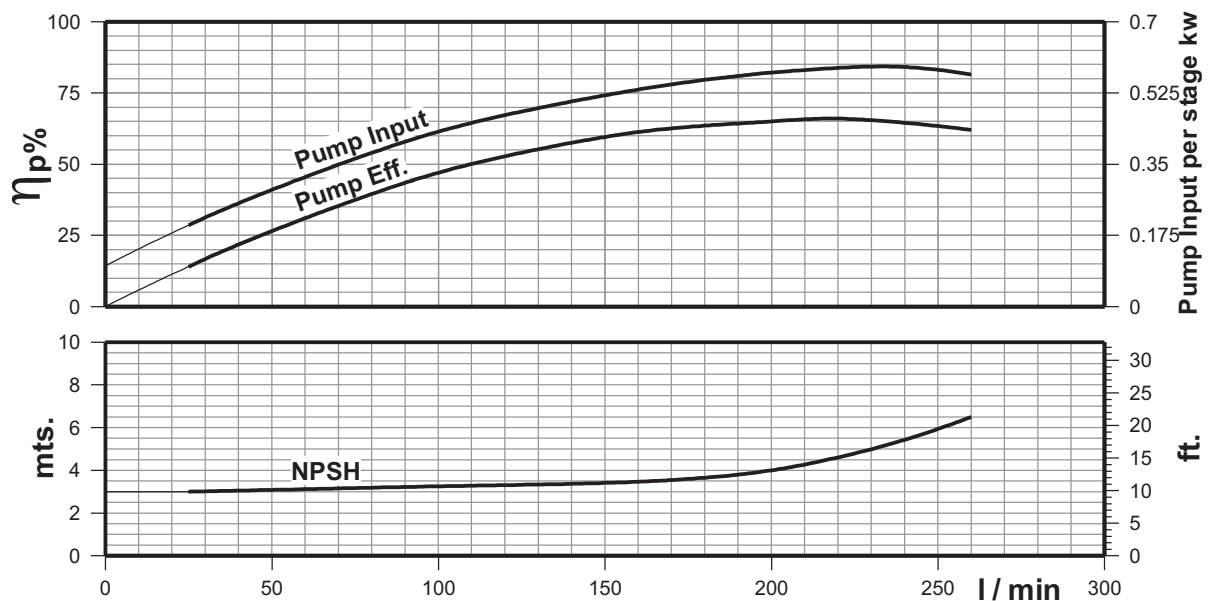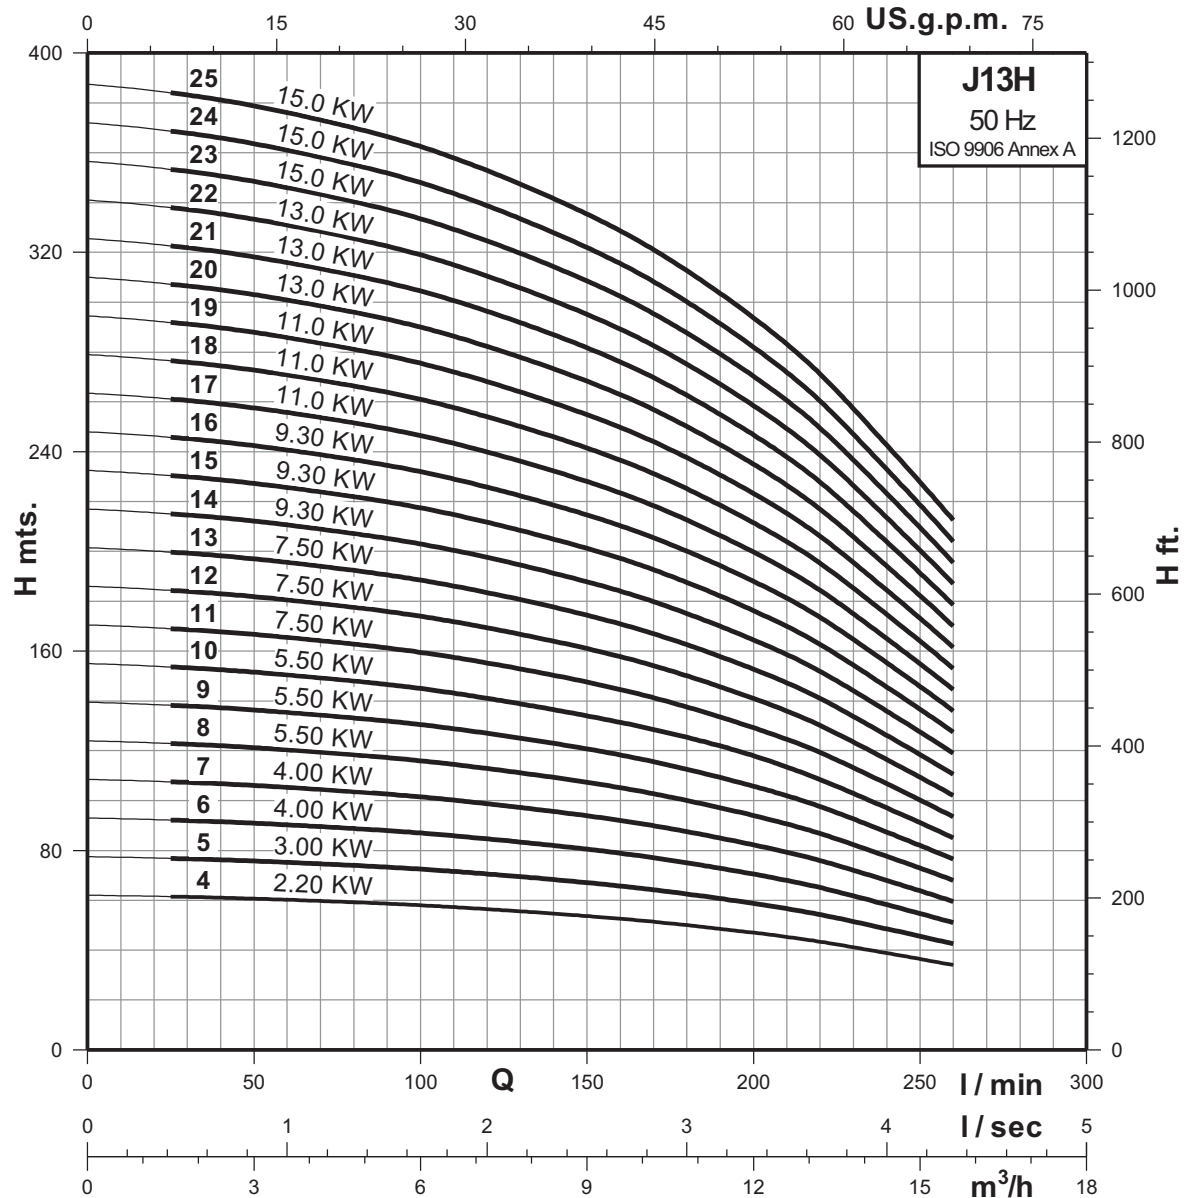


6 INCH

Technical Data

Radial Flow 6" Electric Submersible Pump

J13H

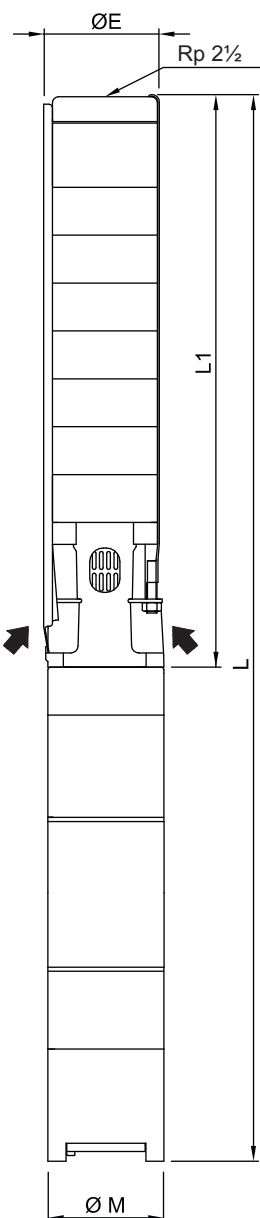

J13H/30 to J13H/50 are Mounted in Sleeve for R 2½ connection.

Performance Chart

Pump Type	Motor Type	H.P.	KW	Q M³/h	n = 2900 rpm						
					0	6.0	9.9	12.0	13.0	14.1	15.6
	Water filled			I/min	0	100	165	200	217	235	260
J13H/26	L6525-KP	25.00	18.50	H mts.	403	377	338	306	286	260	221
J13H/27	L6525-KP	25.00	18.50		419	392	351	317	297	270	230
J13H/28	L6525-KP	25.00	18.50		434	406	364	329	308	280	238
J13H/29	L6525-KP	25.00	18.50		450	421	377	341	319	290	247
J13H/30	L6525-KP	25.00	18.50		465	435	390	353	330	300	255
J13H/31	L6525-KP	25.00	18.50		481	450	403	364	341	310	264
J13H/32	L6525-KP	25.00	18.50		496	464	416	376	352	320	272
J13H/33	L6530-KP	30.00	22.00		512	479	429	388	363	330	281
J13H/34	L6530-KP	30.00	22.00		527	493	442	400	374	340	289
J13H/35	L6530-KP	30.00	22.00		543	508	455	411	385	350	298
J13H/36	L6530-KP	30.00	22.00		558	522	468	423	396	360	306
J13H/37	L6530-KP	30.00	22.00		574	537	481	435	407	370	315
J13H/38	L6530-KP	30.00	22.00		589	551	494	447	418	380	323
J13H/39	L6535-KP	35.00	26.00		605	566	507	458	429	390	332
J13H/40	L6535-KP	35.00	26.00		620	580	520	470	440	400	340
J13H/41	L6535-KP	35.00	26.00		636	595	533	482	451	410	349
J13H/42	L6535-KP	35.00	26.00		651	609	546	494	462	420	357
J13H/43	L6535-KP	35.00	26.00		667	624	559	505	473	430	366
J13H/44	L6535-KP	35.00	26.00		682	638	572	517	484	440	374
J13H/45	L6540-KP	40.00	30.00		698	653	585	529	495	450	383
J13H/46	L6540-KP	40.00	30.00		713	667	598	541	506	460	391
J13H/47	L6540-KP	40.00	30.00		729	682	611	552	517	470	400
J13H/48	L6540-KP	40.00	30.00		744	696	624	564	528	480	408
J13H/49	L6540-KP	40.00	30.00		760	711	637	576	539	490	417
J13H/50	L6540-KP	40.00	30.00		775	725	650	588	550	500	425

Dimensions & Weights of Pump with Water filled Motor

Type Pump + Motor	ØM (mm)	ØE (mm)	Length (mm)			Packaging Details					
			L1	L		Gross Weight (kg)			Gross Volume (m³)		
				1 ~	3 ~	Pump	Pump+Motor		Pump	Pump+Motor	
J13H/26 + L6525-KP	142	143	1494	-	2487	58.5	-	155.5	0.0515	-	0.1105
J13H/27 + L6525-KP	142	143	1539	-	2532	60.3	-	157.3	0.0515	-	0.1105
J13H/28 + L6525-KP	142	143	1584	-	2577	62.9	-	159.9	0.0515	-	0.1105
J13H/29 + L6525-KP	142	143	1629	-	2622	64.1	-	161.1	0.0515	-	0.1105
J13H/30 + L6525-KP	142	175	1674	-	2667	66.3	-	163.3	0.0515	-	0.1105
J13H/31 + L6525-KP	142	175	1719	-	2712	69.3	-	166.3	0.0515	-	0.1105
J13H/32 + L6525-KP	142	175	1764	-	2757	71.2	-	168.2	0.0515	-	0.1105
J13H/33 + L6530-KP	142	175	1809	-	2862	73.3	-	174.3	0.0515	-	0.1105
J13H/34 + L6530-KP	142	175	1854	-	2907	75.3	-	176.3	0.0515	-	0.1105
J13H/35 + L6530-KP	142	175	1899	-	2952	77.2	-	178.2	0.0407	-	0.0997
J13H/36 + L6530-KP	142	175	1944	-	2997	80.3	-	181.3	0.0418	-	0.1008
J13H/37 + L6530-KP	142	175	1989	-	3042	82.2	-	183.2	0.0429	-	0.1019
J13H/38 + L6530-KP	142	175	2034	-	3087	84.2	-	185.2	0.0440	-	0.1030
J13H/39 + L6535-KP	142	175	2079	-	3212	86.2	-	215.2	0.0440	-	0.1780
J13H/40 + L6535-KP	142	175	2124	-	3257	88.2	-	217.2	0.0451	-	0.1791
J13H/41 + L6535-KP	142	175	2169	-	3302	91.5	-	220.5	0.0462	-	0.1802
J13H/42 + L6535-KP	142	175	2214	-	3347	93.8	-	222.8	0.0473	-	0.1813
J13H/43 + L6535-KP	142	175	2259	-	3392	95.9	-	224.9	0.0485	-	0.1825
J13H/44 + L6535-KP	142	175	2304	-	3437	97.8	-	226.8	0.0485	-	0.1825
J13H/45 + L6540-KP	142	175	2349	-	3532	100.3	-	232.3	0.0496	-	0.1836
J13H/46 + L6540-KP	142	175	2394	-	3577	102.3	-	234.3	0.0507	-	0.1847
J13H/47 + L6540-KP	142	175	2439	-	3622	104.5	-	236.5	0.0518	-	0.1858
J13H/48 + L6540-KP	142	175	2484	-	3667	106.9	-	238.9	0.1764	-	0.3104
J13H/49 + L6540-KP	142	175	2529	-	3712	109.5	-	241.5	0.1797	-	0.3137
J13H/50 + L6540-KP	142	175	2574	-	3757	112.0	-	244.0	0.1797	-	0.3137


Note : ØE = For Single Cable Motor Maximum Diameter of Pump Inclusive of Cable Guard.
For Two Cable Motor Maximum Diameter of Pump Inclusive of Cable Guard
Will Increase by 3mm.

Rp 2 & Rp 3 Available on request.

Performance Curves

Radial Flow 6" Electric Submersible Pump

J13H

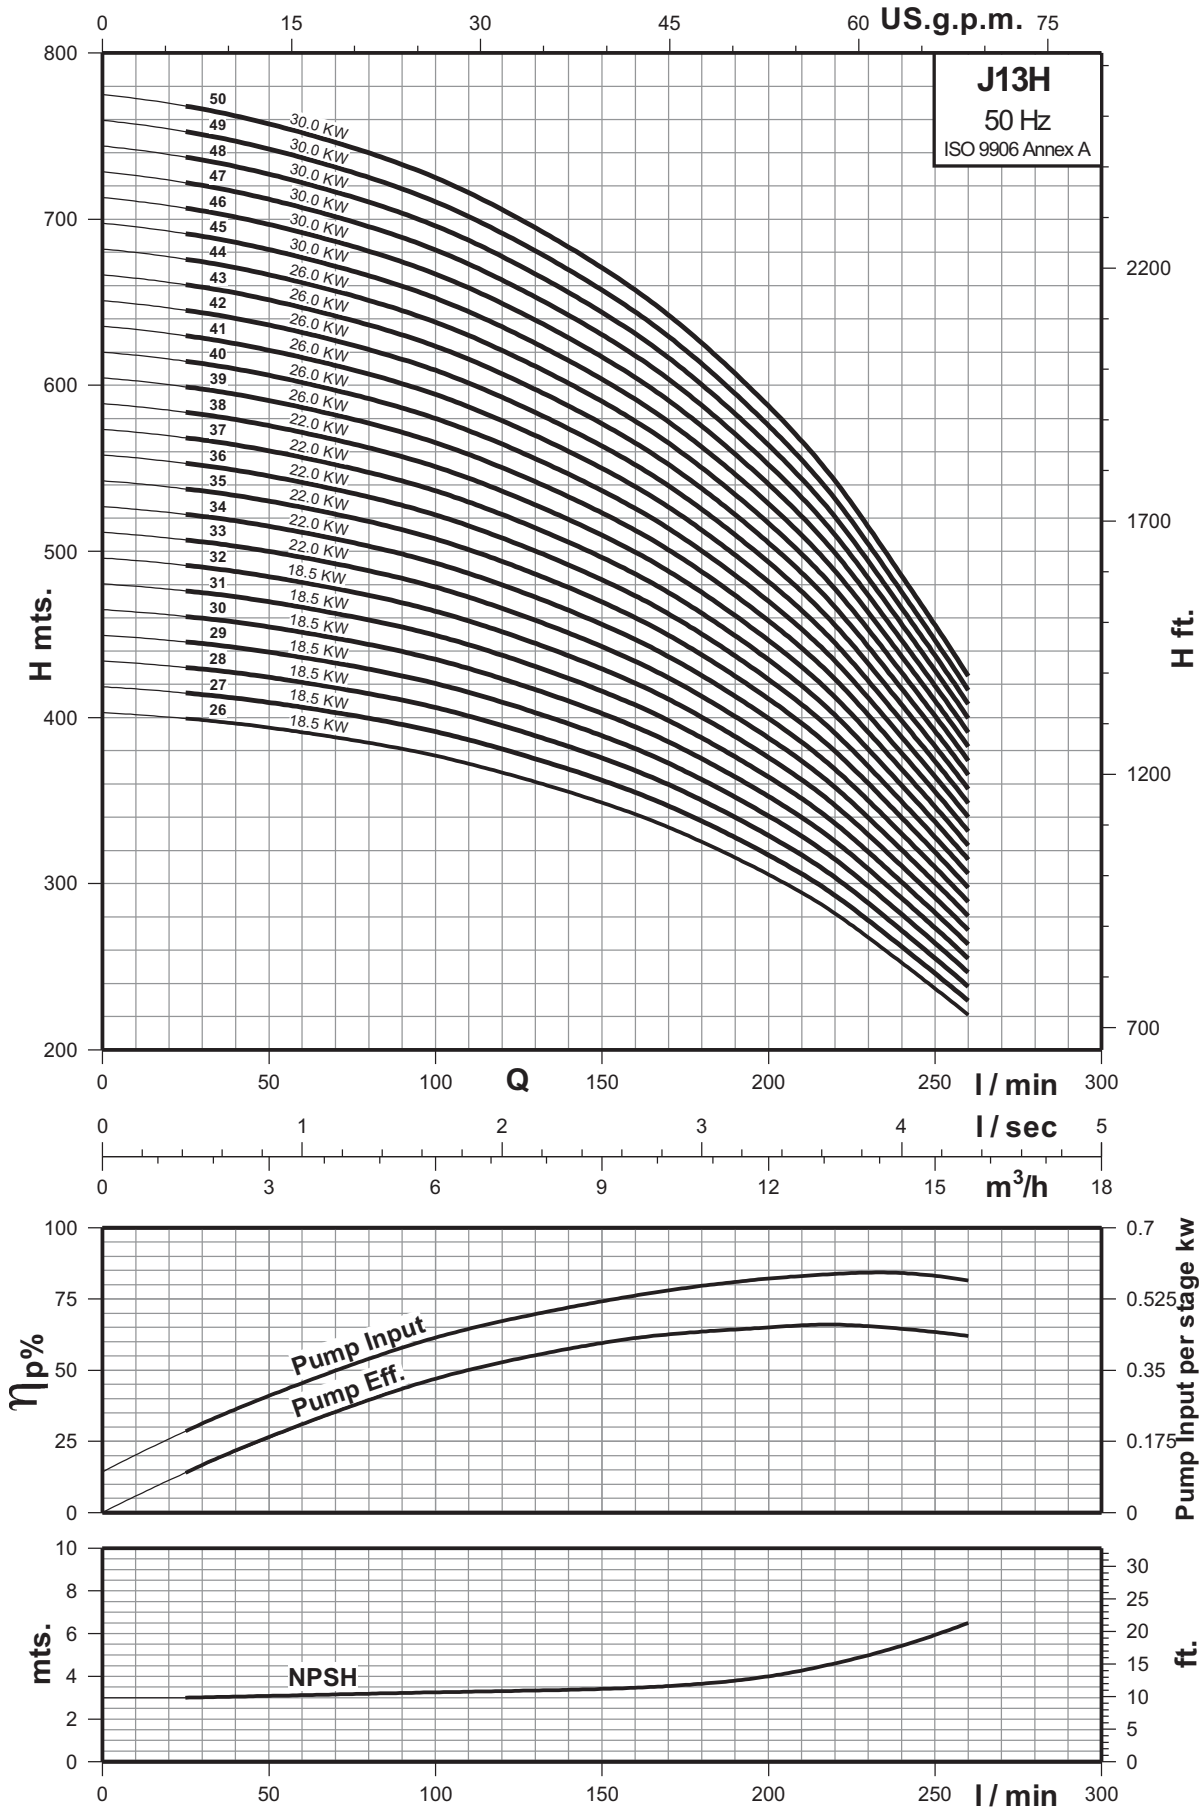

6 INCH