


Technical Data

Radial Flow 6" Electric Submersible Pump

J17A

6 INCH

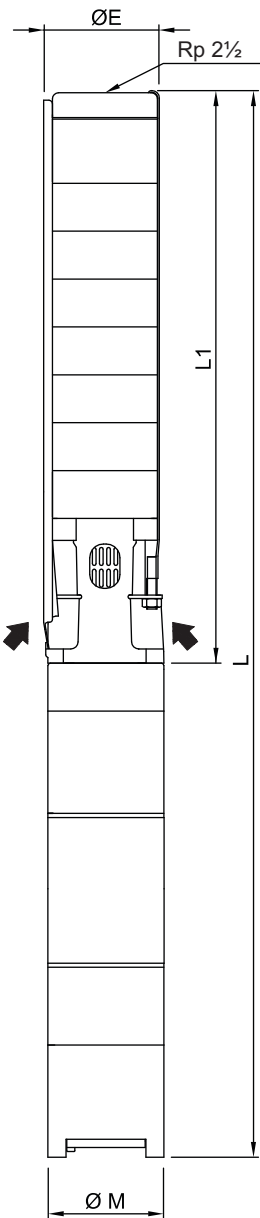

Performance Chart

Pump Type	Motor Type		H.P.	KW	Q M ³ /h I/min	n = 2900 rpm						
	Oil filled	Water filled				0	12.0	14.4	16.8	19.8	22.8	26.0
J17A/05	H4540	L4540	4.00	3.00	H mts.	53	47	44	40	33	23	11
J17A/06	H4540	L4540	4.00	3.00		64	57	53	48	40	27	13
J17A/07	H4555	L4555	5.50	4.00		74	66	62	56	46	32	15
J17A/08	H4555	L4555	5.50	4.00		85	76	71	64	53	36	17
J17A/09	H4575	L4575	7.50	5.50		95	85	80	72	59	41	19
J17A/10	H4575	L4575	7.50	5.50		106	94	89	80	66	45	21
J17A/11	H45100	L6510-KP	10.00	7.50		117	104	98	88	73	50	24
J17A/12	H45100	L6510-KP	10.00	7.50		127	113	107	96	79	54	26
J17A/13	H45100	L6510-KP	10.00	7.50		138	123	115	104	86	59	28
J17A/14	H45100	L6510-KP	10.00	7.50		148	132	124	112	92	63	30
J17A/15	-	L6512-KP	12.50	9.30		159	142	133	120	99	68	32
J17A/16	-	L6512-KP	12.50	9.30		170	151	142	128	106	72	34
J17A/17	-	L6512-KP	12.50	9.30		180	160	151	136	112	77	36
J17A/18	-	L6515-KP	15.00	11.00		191	170	160	144	119	81	39
J17A/19	-	L6515-KP	15.00	11.00		201	179	169	152	125	86	41
J17A/20	-	L6515-KP	15.00	11.00		212	189	178	160	132	90	43
J17A/21	-	L6517-KP	17.50	13.00		223	198	186	168	139	95	45
J17A/22	-	L6517-KP	17.50	13.00		233	208	195	176	145	99	47
J17A/23	-	L6517-KP	17.50	13.00		244	217	204	184	152	104	49
J17A/24	-	L6517-KP	17.50	13.00		254	227	213	192	158	108	51
J17A/25	-	L6520-KP	20.00	15.00		265	236	222	200	165	113	54
J17A/26	-	L6520-KP	20.00	15.00		276	245	231	208	172	118	56

Dimensions & Weights of Pump with Oil filled Motor

Type Pump + Motor	ØM (mm)	ØE (mm)	Length (mm)			Packaging Details					
			L1	L		Gross Weight (kg)			Gross Volume (m ³)		
				1~	3~	Pump	Pump+Motor		Pump	Pump+Motor	
J17A/05 + H4540	95	142	548	-	1120	11.0	-	29.5	0.0234	-	0.0343
J17A/06 + H4540	95	142	603	-	1175	11.8	-	30.3	0.0234	-	0.0343
J17A/07 + H4555	95	142	658	1380	1280	13.1	34.8	34.8	0.0234	0.0343	0.0374
J17A/08 + H4555	95	142	713	1435	1335	14.1	35.8	35.8	0.0234	0.0343	0.0374
J17A/09 + H4575	95	142	768	-	1480	15.4	-	41.1	0.0234	-	0.0374
J17A/10 + H4575	95	142	823	-	1535	17.0	-	42.7	0.0234	-	0.0374
J17A/11 + H45100	95	142	878	-	1690	17.8	-	49.4	0.0234	-	0.0374
J17A/12 + H45100	95	142	933	-	1745	18.5	-	50.1	0.0234	-	0.0374
J17A/13 + H45100	95	142	988	-	1800	19.3	-	50.9	0.0234	-	0.0374
J17A/14 + H45100	95	142	1043	-	1855	20.3	-	51.9	0.0234	-	0.0374

Dimensions & Weights of Pump with Water filled Motor

Type Pump + Motor	ØM (mm)	ØE (mm)	Length (mm)			Packaging Details					
			L1	L		Gross Weight (kg)			Gross Volume (m ³)		
				1~	3~	Pump	Pump+Motor		Pump	Pump+Motor	
J17A/05 + L4540	95	142	548	-	1221	11.0	-	38.0	0.0234	-	0.0374
J17A/06 + L4540	95	142	603	-	1276	11.8	-	38.8	0.0234	-	0.0374
J17A/07 + L4555	95	142	658	1451	1381	13.1	42.4	42.4	0.0234	0.0343	0.0374
J17A/08 + L4555	95	142	713	1506	1436	14.1	43.4	43.4	0.0234	0.0343	0.0374
J17A/09 + L4575	95	142	768	-	1611	15.4	-	46.9	0.0234	-	0.0374
J17A/10 + L4575	95	142	823	-	1666	17.0	-	48.5	0.0234	-	0.0374
J17A/11 + L6510-KP	142	142	878	-	1636	17.8	-	82.8	0.0234	-	0.0744
J17A/12 + L6510-KP	142	142	933	-	1691	18.5	-	83.5	0.0234	-	0.0744
J17A/13 + L6510-KP	142	142	988	-	1746	19.3	-	84.3	0.0234	-	0.0744
J17A/14 + L6510-KP	142	142	1043	-	1801	20.3	-	85.3	0.0234	-	0.0744
J17A/15 + L6512-KP	142	142	1098	-	1896	23.2	-	91.2	0.0234	-	0.0744
J17A/16 + L6512-KP	142	142	1122	-	1920	23.8	-	91.8	0.0360	-	0.0870
J17A/17 + L6512-KP	142	142	1140	-	1938	24.9	-	92.9	0.0360	-	0.0870
J17A/18 + L6515-KP	142	142	1263	-	2096	25.8	-	98.8	0.0360	-	0.0870
J17A/19 + L6515-KP	142	142	1318	-	2151	26.5	-	99.5	0.0360	-	0.0870
J17A/20 + L6515-KP	142	142	1373	-	2206	27.5	-	100.5	0.0360	-	0.0870
J17A/21 + L6517-KP	142	142	1428	-	2291	28.6	-	107.6	0.0360	-	0.0870
J17A/22 + L6517-KP	142	142	1483	-	2346	30.0	-	109.0	0.0360	-	0.0870
J17A/23 + L6517-KP	142	142	1538	-	2401	31.1	-	110.1	0.0360	-	0.0870
J17A/24 + L6517-KP	142	142	1593	-	2456	32.1	-	111.1	0.0360	-	0.0870
J17A/25 + L6520-KP	142	142	1648	-	2581	32.6	-	119.6	0.0360	-	0.0950
J17A/26 + L6520-KP	142	142	1703	-	2636	33.1	-	120.1	0.0360	-	0.0950

Rp 2 & Rp 3
Available on request.




Note : ØE = For Single Cable Motor Maximum Diameter of Pump Inclusive of Cable Guard.
For Two Cable Motor Maximum Diameter of Pump Inclusive of Cable Guard Will Increase by 3mm.
For 4" Oil Filled and 4" Water Filled 3~ Motor add -T Subscript to Motor type.



Performance Curves

Radial Flow 6" Electric Submersible Pump

J17A

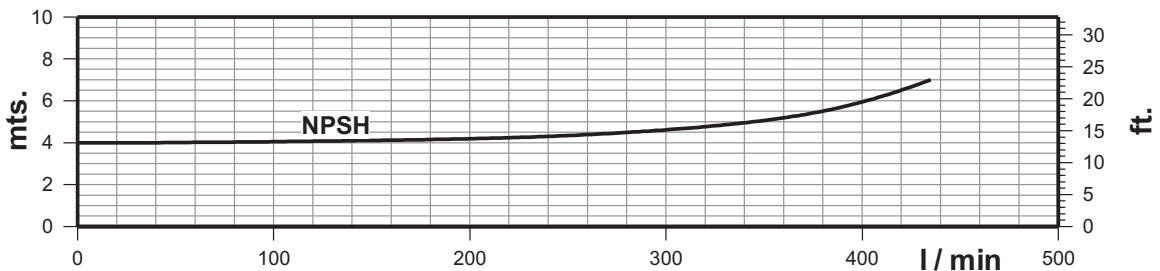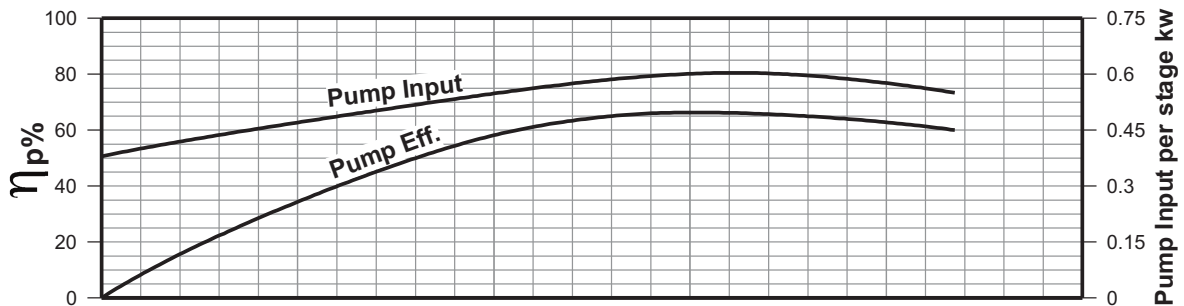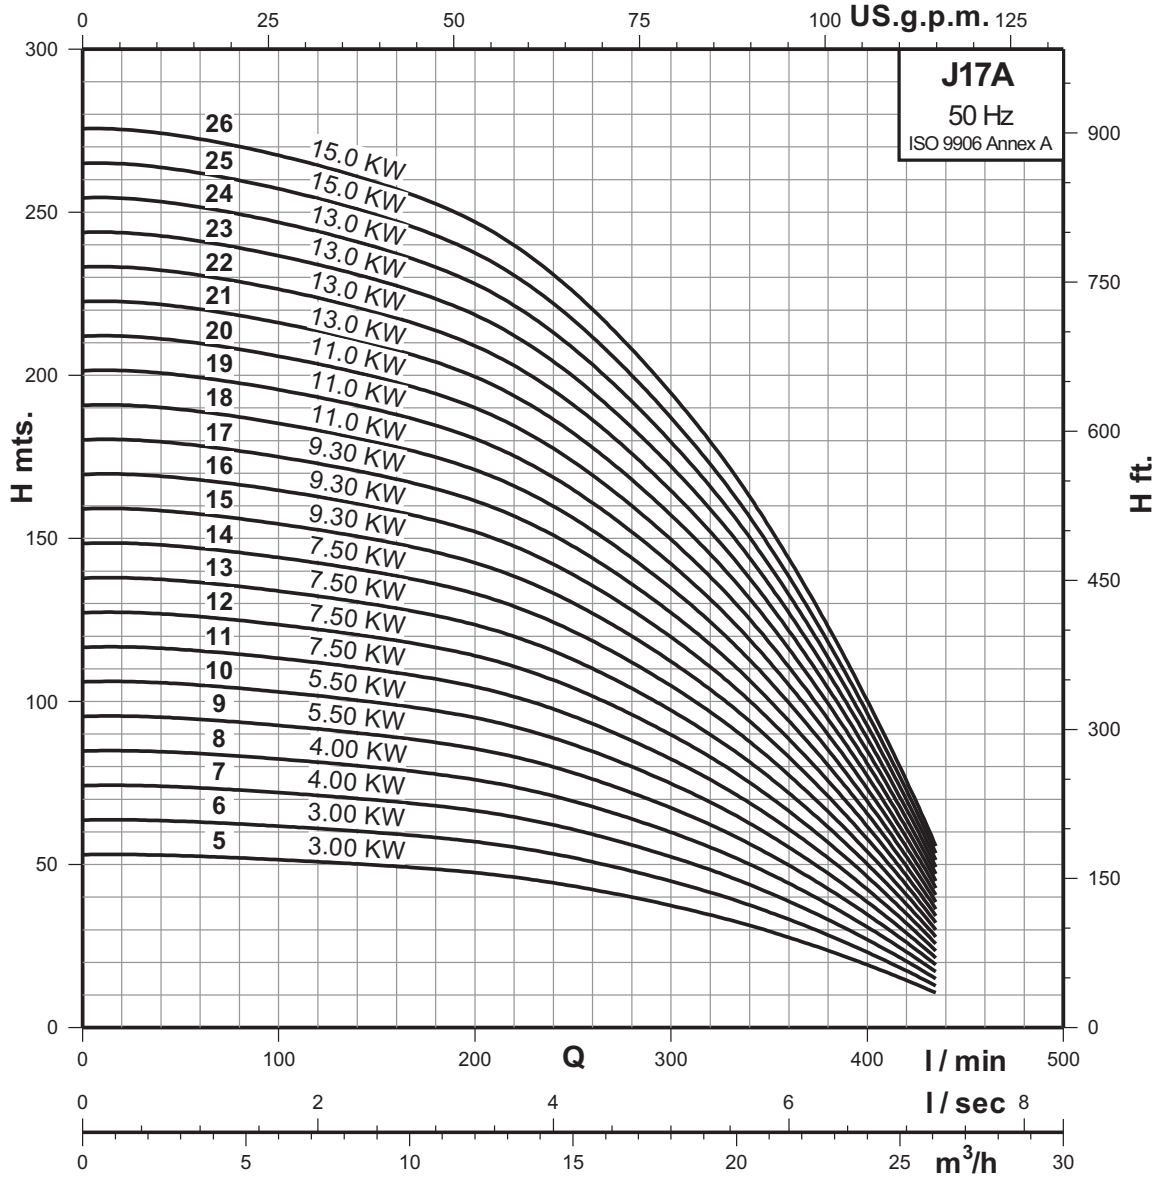


6 INCH

Technical Data

Radial Flow 6" Electric Submersible Pump

J17A

6 INCH

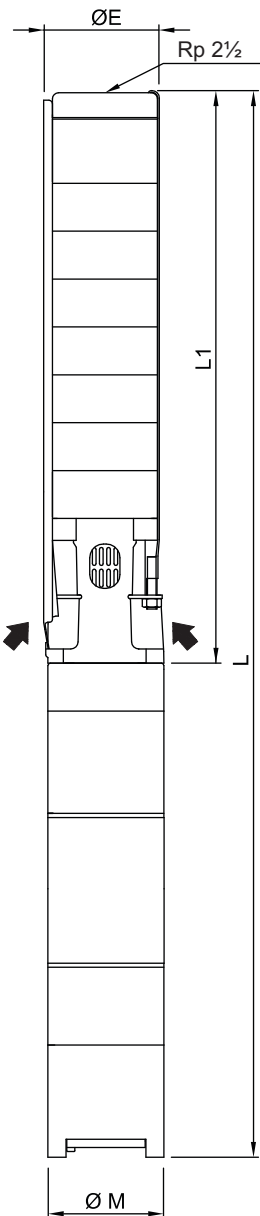

Performance Chart

Pump Type	Motor Type Water filled	H.P.	KW	Q M ³ /h l/min	n = 2900 rpm						
					0	12.0	14.4	16.8	19.8	22.8	26.0
					0	200	240	280	330	380	435
J17A/27	L6520-KP	20.00	15.00	H mts.	286	255	240	216	178	122	58
J17A/28	L6525-KP	25.00	18.50		297	264	249	224	185	127	60
J17A/29	L6525-KP	25.00	18.50		307	274	258	232	191	131	62
J17A/30	L6525-KP	25.00	18.50		318	283	266	240	198	136	64
J17A/31	L6525-KP	25.00	18.50		329	293	275	248	205	140	66
J17A/32	L6525-KP	25.00	18.50		339	302	284	256	211	145	68
J17A/33	L6525-KP	25.00	18.50		350	312	293	264	218	149	71
J17A/34	L6525-KP	25.00	18.50		360	321	302	272	224	154	73
J17A/35	L6530-KP	30.00	22.00		371	330	311	280	231	158	75
J17A/36	L6530-KP	30.00	22.00		382	340	320	288	238	163	77
J17A/37	L6530-KP	30.00	22.00		392	349	329	296	244	167	79
J17A/38	L6530-KP	30.00	22.00		403	359	337	304	251	172	81
J17A/39	L6530-KP	30.00	22.00		413	368	346	312	257	176	83
J17A/40	L6530-KP	30.00	22.00		424	378	355	320	264	181	86
J17A/41	L6535-KP	35.00	26.00		435	387	364	328	271	185	88
J17A/42	L6535-KP	35.00	26.00		445	396	373	336	277	190	90
J17A/43	L6535-KP	35.00	26.00		456	406	382	344	284	194	92

Dimensions & Weights of Pump with Water filled Motor

Type Pump + Motor	ØM (mm)	ØE (mm)	Length (mm)			Packaging Details					
			L1	L		Gross Weight (kg)			Gross Volume (m ³)		
				1 ~	3 ~	Pump	Pump+Motor		Pump	Pump+Motor	
							1 ~	3 ~		1 ~	3 ~
J17A/27 + L6520-KP	142	142	1758	-	2691	33.7	-	120.7	0.0360	-	0.0950
J17A/28 + L6525-KP	142	142	1813	-	2806	34.3	-	125.3	0.0457	-	0.1047
J17A/29 + L6525-KP	142	142	1868	-	2861	34.8	-	125.8	0.0457	-	0.1047
J17A/30 + L6525-KP	142	142	1923	-	2916	53.5	-	144.5	0.1406	-	0.1996
J17A/31 + L6525-KP	142	142	1978	-	2971	58.0	-	149.0	0.1444	-	0.2034
J17A/32 + L6525-KP	142	142	2033	-	3026	60.0	-	151.0	0.1483	-	0.2073
J17A/33 + L6525-KP	142	142	2088	-	3081	62.0	-	153.0	0.1521	-	0.2111
J17A/34 + L6525-KP	142	142	2143	-	3136	64.0	-	155.0	0.1560	-	0.2150
J17A/35 + L6530-KP	142	142	2198	-	3251	66.5	-	167.5	0.1598	-	0.2188
J17A/36 + L6530-KP	142	142	2253	-	3306	68.0	-	169.0	0.1666	-	0.2256
J17A/37 + L6530-KP	142	175	2308	-	3361	70.0	-	171.0	0.1675	-	0.2265
J17A/38 + L6530-KP	142	175	2363	-	3416	72.0	-	173.0	0.1714	-	0.2304
J17A/39 + L6530-KP	142	175	2418	-	3471	74.8	-	175.8	0.1752	-	0.2342
J17A/40 + L6530-KP	142	175	2473	-	3526	78.0	-	179.0	0.1791	-	0.2381
J17A/41 + L6535-KP	142	175	2528	-	3661	81.5	-	210.5	0.1829	-	0.3169
J17A/42 + L6535-KP	142	175	2583	-	3716	85.0	-	214.0	0.1868	-	0.3208
J17A/43 + L6535-KP	142	175	2638	-	3771	87.0	-	216.0	0.1906	-	0.3246

J17/37 to J17/43 are Mounted in Sleeve for R 2 1/2 connection.


Note : ØE = For Single Cable Motor Maximum Diameter of Pump Inclusive of Cable Guard. For Two Cable Motor Maximum Diameter of Pump Inclusive of Cable Guard Will Increase by 3mm.

Rp 2 & Rp 3 Available on request.

Performance Curves

Radial Flow 6" Electric Submersible Pump

J17A

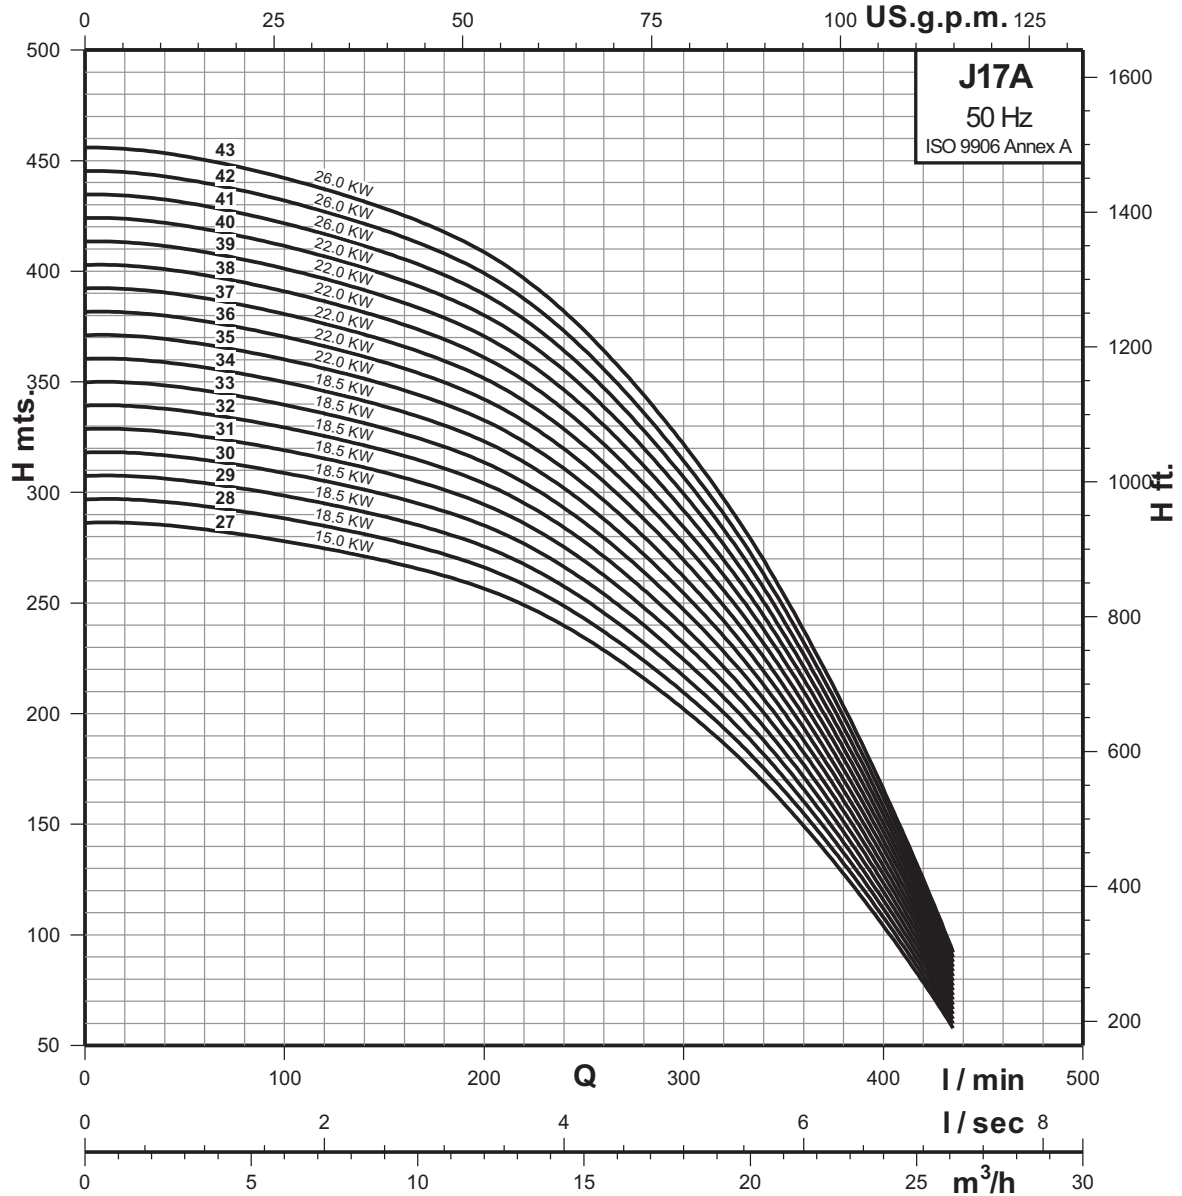

6 INCH

