


Technical Data

Single-stage end-suction pumps

LES 32-200L2 2-pole

2 POLE

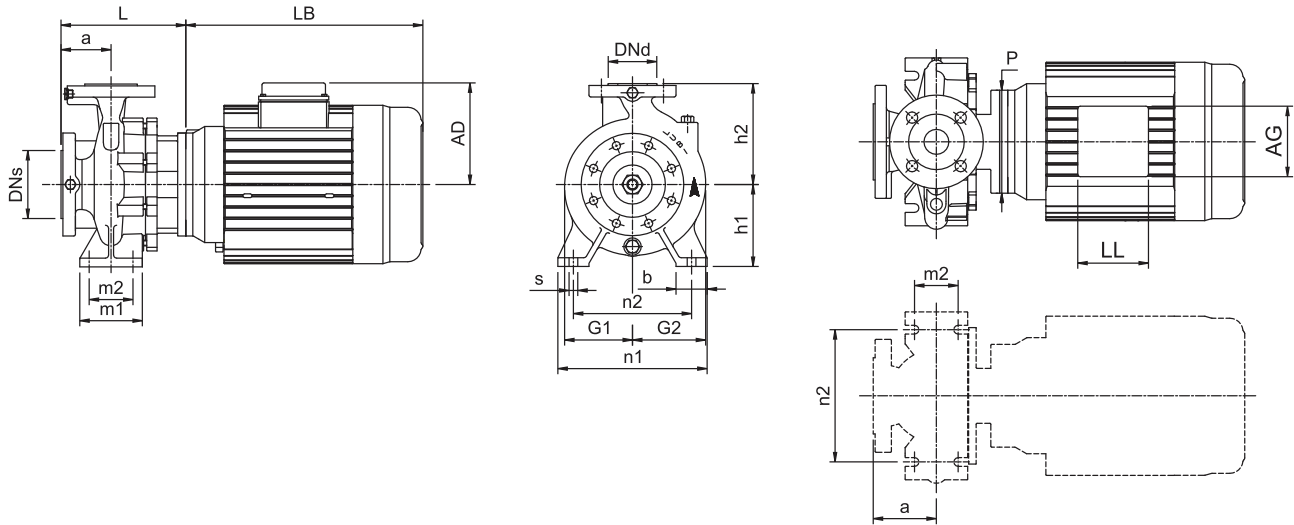


Power	[kw]	5.5	7.5	9.3	11
	[hp]	7.5	10	12.5	15
Frame		112M	132M	132M	132M
PN	[bar]	16	16	16	16
Code for Impeller diameter		D	C	B	A
DN1	[mm]	50	50	50	50
DNd	[mm]	32	32	32	32
a	[mm]	80	80	80	80
h2	[mm]	180	180	180	180
L	[mm]	175	180	180	180
h1	[mm]	160	160	160	160
G1	[mm]	135	135	135	135
G2	[mm]	147	147	147	147
m1	[mm]	100	100	100	100
m2	[mm]	70	70	70	70
n1	[mm]	240	240	240	240
n2	[mm]	190	190	190	190
b	[mm]	50	50	50	50
s	[mm]	14	14	14	14
H	[mm]	-	-	-	-
LB	[mm]	356	417	417	417
AD	[mm]	150	178	178	178
AG	[mm]	112	112	112	112
LL	[mm]	112	112	112	112
P	[mm]	165	225	225	225
C	[mm]	-	-	-	-
B	[mm]	-	-	-	-
A	[mm]	-	-	-	-
K	[mm]	-	-	-	-
Net Weight	[kg]	62	83	88	93
Gross Weight	[kg]	72	93	98	103
Volume	[m³]	0.104	0.142	0.142	0.142

Performance curves

Single-stage end-suction pumps

LES 32-200L2

2-pole

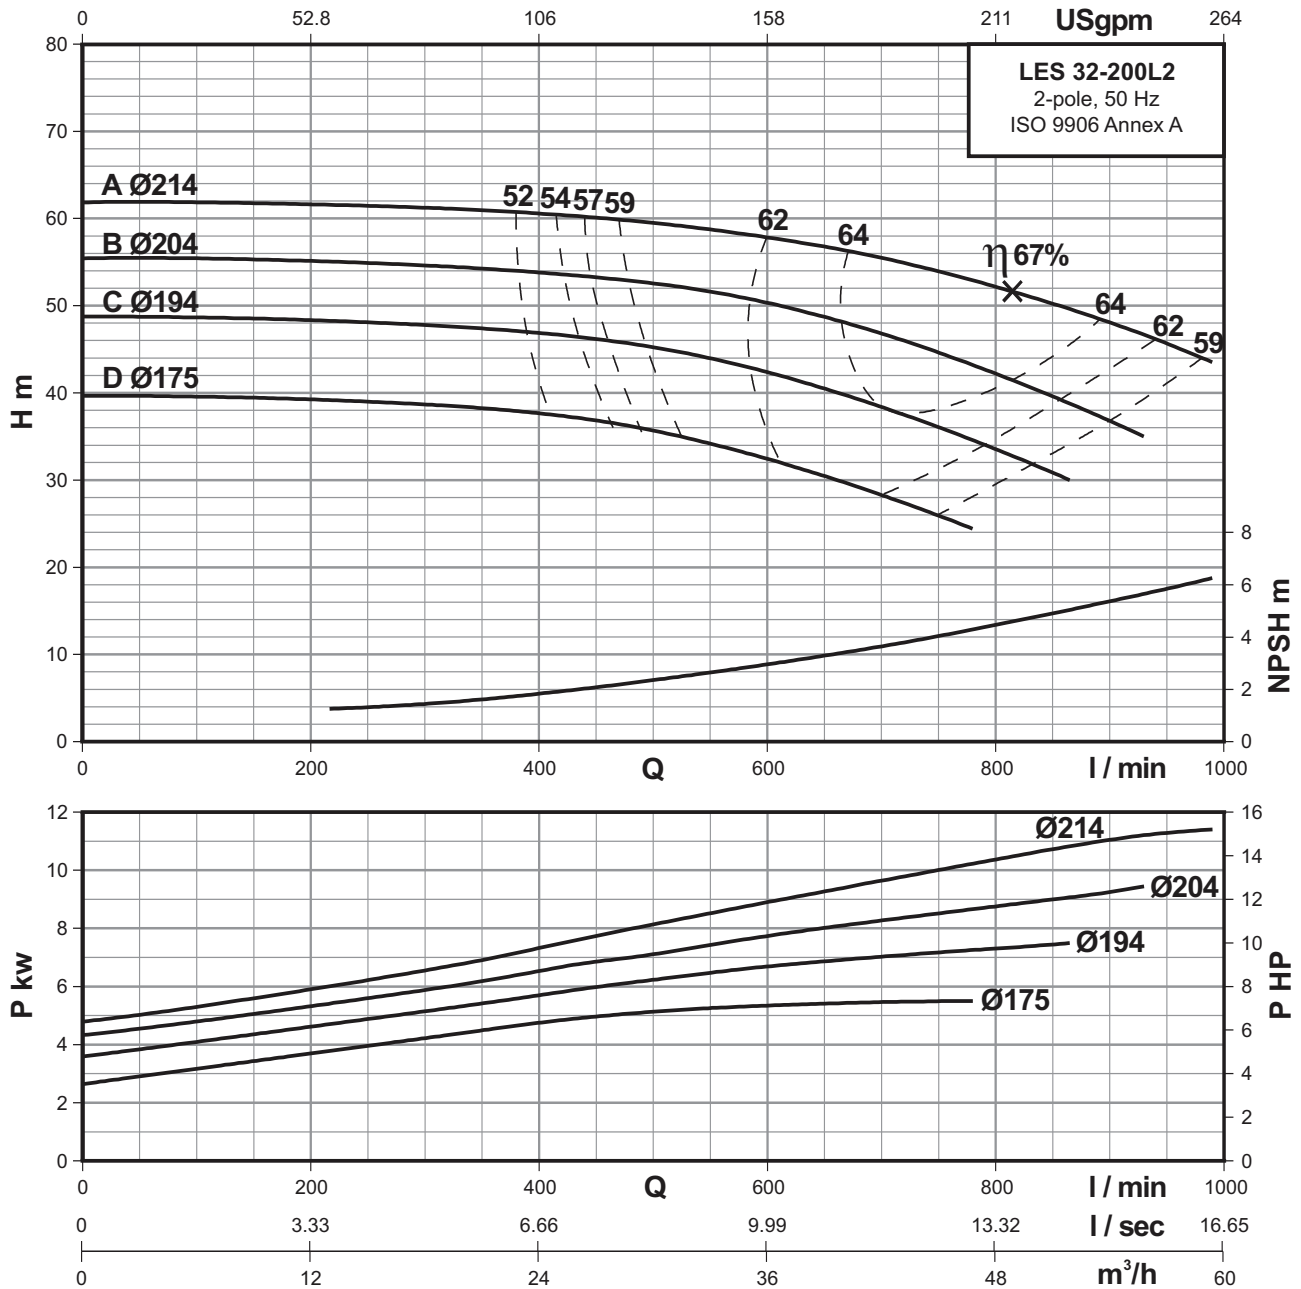

2 POLE

Performance Data At n=2900 RPM

MODEL	POWER		m³/h l/min	6	12	18	24	30	36	42	48	54	60
	KW	HP		100	200	300	400	500	600	700	800	900	1000
LES 32-200L2D	5.5	7.5	H (m)	39.7	39.4	38.5	37.7	35.8	32.4	28.1	-	-	-
LES 32-200L2C	7.5	10.0		48.7	48.4	47.9	47	45.5	42.3	38.2	34	-	-
LES 32-200L2B	9.3	12.5		55.4	55	54.5	54	52.6	50	46.8	42	36.8	-
LES 32-200L2A	11.0	15.0		61.9	61.7	61.3	60.6	59.7	58	55.5	52	48	43